

SKYTEC® | XENON XN135

HIGH CHEMICAL RESISTANT GAUNTLET WITH EXCELLENT GRIP

Triple dipped nitrile gauntlet with a nitrile sandy finish palm providing excellent grip in wet and oily conditions whilst protecting from chemicals.

FEATURES

- › A soft, lightweight and robust glove offering great dexterity
- › Triple coated nitrile provides a strong chemical resistance
- › Superior grip in wet and oily environments
- › Thin nylon liner to improve comfort and reduce sweat
- › Long cuff to provide forearm protection
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin



SUITABLE FOR

Typical Industries

- Chemical/ Petrochemical
- Construction
- Manufacturing
- Oil and Gas
- Waste

Suitable Applications

- Canning
- Cementing
- Chemical/Oils Parts Handling
- Oil Submersion

CERTIFICATION



See overleaf for explanation

PRODUCT INFORMATION

MATERIALS	LINER:	18 gauge nylon
	COATING:	Nitrile, sandy finish palm
COLOUR	Green/Black	
LENGTH (mm)	350 (Size Dependent)	
CUFF STYLE	Gauntlet	

RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKY00142	10 pairs per bag 60 pairs per case
9/L	SKY00143	
10/XL	SKY00144	
11/XXL	SKY00145	

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

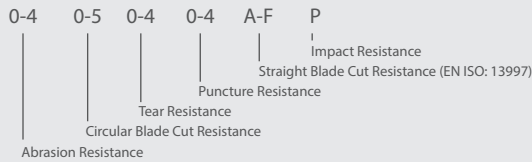

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

