

**HIGH CUT RESISTANT IMPACT GLOVE WITH ROBUST AND FLEXIBLE IMPACT PANEL**

A flexible seamless impact cut resistant glove level E/A5 with sandy nitrile on the palm to maximize grip. Ergonomic TPR design allows outstanding flexibility

**FEATURES**

- › Cut resistance: level E (EN388:2016) / ANSI A5
- › 13 gauge (HPPE, steel) liner offers great dexterity for fine handling
- › Excellent grip with a nitrile foam sandy coating on the palm.
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand.
- › Reinforced thumb crotch enhances durability
- › Ergonomically designed TPR follow the hand movement reducing hand fatigue
- › TPR zones are sewn to the liner for increased resistance
- › Adjustable cuff with elastic for a custom fit
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)



**SUITABLE FOR**


**Typical Industries**

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

**Suitable Applications**

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

**CERTIFICATION**

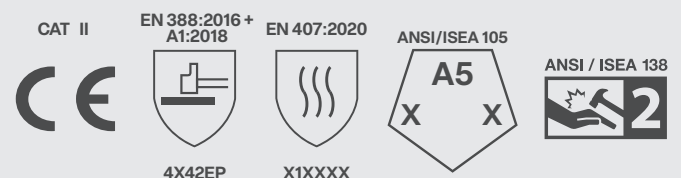

See overleaf for explanation

PRODUCTION INFORMATION		
MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Foam nitrile
COLOUR	Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

- | RECOMMENDATIONS FOR USE  |  |
|--|--|
| <ul style="list-style-type: none"> <li>USE: General handling glove with cut and impact protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement</li> <li>STORAGE: Store in dry conditions in the original packaging and away from direct sunlight</li> <li>CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present</li> <li>LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use</li> </ul> |  |

ORDERING DETAILS		
SIZE	CODE	PACKAGING
7/S	SKG00081FD	10 pairs per bag
8/M	SKG00081FF	
9/L	SKG00081FH	
10/XL	SKG00081FJ	60 pairs per case
11/XXL	SKG00081FL	
12/XXXL	SKG00081FN	

CERTIFICATION LEGENDS																							
<p>MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*</p> <p>0-4 0-5 0-4 0-4 A-F P</p> <p>Abrasion Resistance    Circular Blade Cut Resistance    Tear Resistance    Puncture Resistance    Straight Blade Cut Resistance (EN ISO: 13997)    Impact Resistance</p> <p>*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter</p>	<table border="1"> <thead> <tr> <th colspan="2">CLASSIFICATION FOR CUT RESISTANCE</th> </tr> <tr> <th>Measured breakthrough time</th> <th>Permeation performance index (grams)</th> </tr> </thead> <tbody> <tr><td>A1</td><td>≥ 200</td></tr> <tr><td>A2</td><td>≥ 500</td></tr> <tr><td>A3</td><td>≥ 1000</td></tr> <tr><td>A4</td><td>≥ 1500</td></tr> <tr><td>A5</td><td>≥ 2200</td></tr> <tr><td>A6</td><td>≥ 3000</td></tr> <tr><td>A7</td><td>≥ 4000</td></tr> <tr><td>A8</td><td>≥ 5000</td></tr> <tr><td>A9</td><td>&gt; 6000</td></tr> </tbody> </table>	CLASSIFICATION FOR CUT RESISTANCE		Measured breakthrough time	Permeation performance index (grams)	A1	≥ 200	A2	≥ 500	A3	≥ 1000	A4	≥ 1500	A5	≥ 2200	A6	≥ 3000	A7	≥ 4000	A8	≥ 5000	A9	> 6000
CLASSIFICATION FOR CUT RESISTANCE																							
Measured breakthrough time	Permeation performance index (grams)																						
A1	≥ 200																						
A2	≥ 500																						
A3	≥ 1000																						
A4	≥ 1500																						
A5	≥ 2200																						
A6	≥ 3000																						
A7	≥ 4000																						
A8	≥ 5000																						
A9	> 6000																						
<p>HEAT AND FIRE EN 407</p> <p>PERFORMANCE LEVELS</p> <p>0-4 0-4 0-4 0-4 0-4 0-4</p> <p>Contact Heat Resistance    Burning Behaviour    Convective Heat Resistance    Radiant Heat Resistance    Resistance to Small Drops Of Molten Metal    Resistance to Large Splashes of Molten Metal</p>	<table border="1"> <thead> <tr> <th colspan="3">CLASSIFICATION FOR IMPACT RESISTANCE</th> </tr> <tr> <th>Performance level</th> <th>Mean (kJ)</th> <th>All impacts (kJ)</th> </tr> </thead> <tbody> <tr><td>1</td><td>≤ 9</td><td>&lt; 11.3</td></tr> <tr><td>2</td><td>≤ 6.5</td><td>≤ 8.1</td></tr> <tr><td>3</td><td>≤ 4</td><td>≤ 5</td></tr> </tbody> </table>	CLASSIFICATION FOR IMPACT RESISTANCE			Performance level	Mean (kJ)	All impacts (kJ)	1	≤ 9	< 11.3	2	≤ 6.5	≤ 8.1	3	≤ 4	≤ 5							
CLASSIFICATION FOR IMPACT RESISTANCE																							
Performance level	Mean (kJ)	All impacts (kJ)																					
1	≤ 9	< 11.3																					
2	≤ 6.5	≤ 8.1																					
3	≤ 4	≤ 5																					

## GLOBUS

**EUROPE**  
[www.globusgroup.com](http://www.globusgroup.com)  
**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST & AFRICA**  
[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)  
**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

**GLOBUS AMERICAS**  
[www.globusgroup.com](http://www.globusgroup.com)  
**E:** americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA