

SKYTEC™ | Tons TP-5

CUT RESISTANT GLOVE WITH POLYURETHANE PALM COATING AND RECYCLED POLYESTER

From the TONS range, with very good mechanical resistance and excellent cut protection.

FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable palm coating resists rips and abrasion
- › Excellent grip in dry handling conditions
- › Flexible close-fitting design for a comfortable wearing experience
- › Breathable and lightweight
- › Knitwrist cuff style
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1PET bottle of 500ml recycled



CUT LEVEL D

VENDING MACHINE COMPATIBLE

RECYCLED 100 claim standard

ECO

SUITABLE FOR

- | | |
|---|---|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Automotive ▪ Construction ▪ Engineering ▪ Logistics ▪ Metals ▪ Waste Management | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Glass Handling ▪ Injection Moulding ▪ Metal Fabrication ▪ Waste Management |
|---|---|

CERTIFICATION

| | | |
|--------|-------------|---------------|
| CAT II | EN 388:2016 | ANSI/ISEA 105 |
| | | |
| | 4X43D | |

See overleaf for explanation



Tons TP-5

PRODUCTION INFORMATION

| | | |
|-------------|------------------------|--|
| MATERIALS | LINER: | 13 gauge HPPE, glass fibre, recycled polyester |
| | COATING: | Polyurethane (PU) |
| COLOUR | Grey / Grey | |
| LENGTH (mm) | 250 (size dependent) | |
| CUFF STYLE | Elasticated knit wrist | |

ORDERING DETAILS

| SIZE | CODE | PACKAGING |
|--------|---------|--------------------|
| 6/XS | TNS0600 | 10 pairs per bag |
| 7/S | TNS0601 | |
| 8/M | TNS0602 | 120 pairs per case |
| 9/L | TNS0603 | |
| 10/XL | TNS0604 | |
| 11/XXL | TNS0605 | |


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

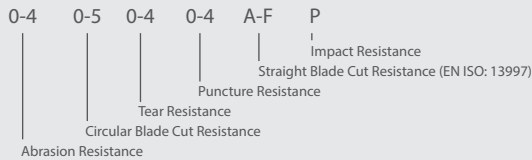

CLASSIFICATION FOR CUT RESISTANCE

| Measured breakthrough time | Permeation performance index (grams) |
|----------------------------|--------------------------------------|
| A1 | ≥ 200 |
| A2 | ≥ 500 |
| A3 | ≥ 1000 |
| A4 | ≥ 1500 |
| A5 | ≥ 2200 |
| A6 | ≥ 3000 |
| A7 | ≥ 4000 |
| A8 | ≥ 5000 |
| A9 | > 6000 |

ANSI/ISEA 105-2016 ABRASION RATING CHART

| Abrasion Level Rating | 0 | 1 | 2 | 3 | 4 | 5 | 6 |
|-------------------------|------|------|------|--------|--------|---------|---------|
| Gram Load | 500 | 500 | 500 | 500 | 1000 | 1000 | 1000 |
| Abrasion Cycles to Fail | <100 | ≥100 | ≥500 | ≥1,000 | ≥3,000 | ≥10,000 | ≥20,000 |

ANSI/ISEA PUNCTURE RESISTANCE

| ANSI Puncture Level | Puncture Resistance (newtons) |
|---------------------|-------------------------------|
| 1 | 10-19 |
| 2 | 20-59 |
| 3 | 60-99 |
| 4 | 100-149 |
| 5 | 150+ |

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-TONS-TP5-1123,1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.