



SKYTEC™ ECO

NICKEL™

GENERAL HANDLING PU COATED GLOVE WITH RECYCLED POLYESTER

Lightweight general handling glove with PU coating and recycled polyester

FEATURES

- › Good abrasion and tear resistance, with a secure grip
- › GRS (Global Recycled Standard) certified
- › Comfortable with an anatomical shaped fit, allowing excellent freedom of movement and reduction of hand fatigue
- › Recommended for precise operations requiring maximum dexterity
- › Ideal for detailed assembly, light fabrication and small parts handling
- › 1 pair = 2 500ml (PET) plastic bottles, recycled



LIGHTWEIGHT
15gg LINER

SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Electronics
- Manufacturing

Suitable Applications

- Assembly of Small Components
- Maintenance
- Operating Machinery
- Quality Control
- Second and Final Fix

CERTIFICATION

UK
CA

CAT II



EN 388:2016
+ A1:2018



3131X

ANSI



ABRASION

ANSI



PUNCTURE

GLOBUS



PRODUCT INFORMATION

MATERIALS	LINER:	15 gauge recycled polyester
	COATING:	Polyurethane (PU)
COLOUR	Black/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00053BB	10 pairs per paper wrap
7/S	SKG00053BD	
8/M	SKG00053BF	
9/L	SKG00053BH	
10/XL	SKG00053BJ	
11/XXL	SKG00053BL	120 pairs per case


RECOMMENDATIONS FOR USE

- **USE:** Cold resistant glove. Not suitable for thermal (heat), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

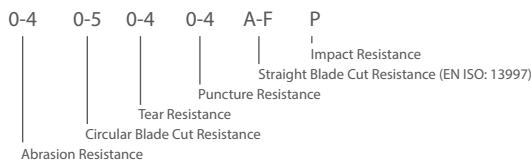

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-ECO-NICKEL-0623_1 C

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom, [UK Approved Body No. 1105]

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.